



紡絲噴嘴 JA-SP Type

Spinning Jet JA-SP-16-1.3J

本產品提供較多且均勻的交絡點。


開放式的設計，掛紗容易，操作簡單。

使用於 POY/FOY/FDY 與 SDY 加工工程。適用於
聚酯纖維(PET)/聚醯胺纖維(NYLON) 和聚丙烯
纖維(PP)等纖維。

Provides more and regular interlacing nodes.

Open type design, very easy for yarn threading.

This series can be used with polyester /polyamide/
polypropylene for POY/FOY/FDY and SDY applications.

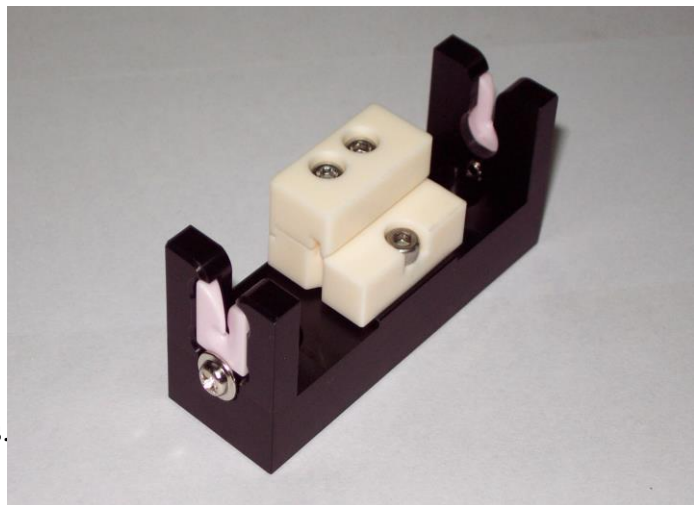


I. 規格

Specifications

Spinning Jet Type	JA-SP-16-1.3J
Air hole (mm)	Ø 1.3
Pressure range(kg/cm ²)	1 - 6
Spinning count(den)	< 250
Take-up speed (m/min)	~ 7000

II. 噴嘴空氣耗氣量

Jet air consumption

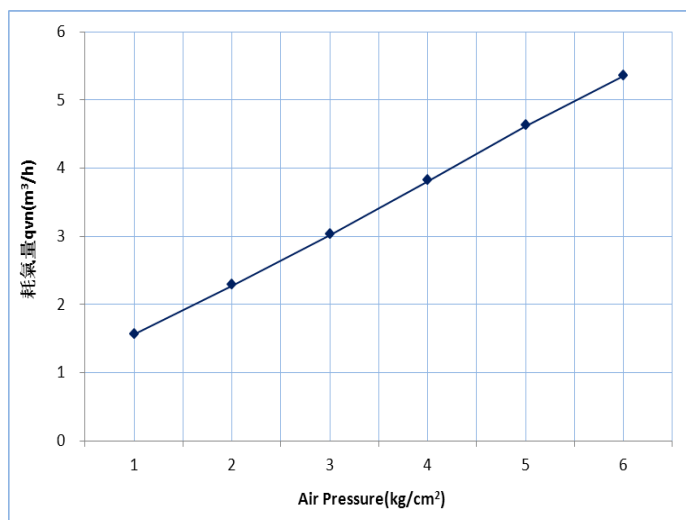

III. 噴嘴尺寸

Jet dimensions

