



# 紡絲噴嘴 JA-SP Type

## Spinning Jet JA-SP-16-1.3J-D

本產品提供均勻且牢度佳的交絡點。


開放式的設計，掛紗容易，操作簡單。

使用於 POY/FOY/FDY 與 SDY 加工工程。適用於  
聚酯纖維(PET)/聚醯胺纖維(NYLON) 和聚丙烯  
纖維(PP)等纖維。

Provides more and regular interlacing nodes.

Open type design, very easy for yarn threading.

This series can be used with polyester /polyamide/  
polypropylene for POY/FOY/FDY and SDY  
applications.

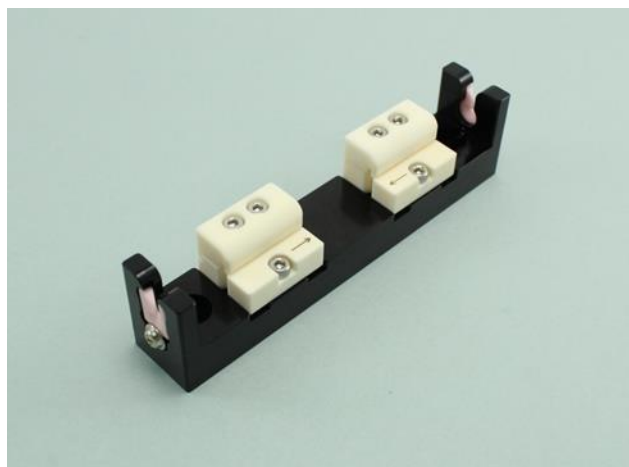


### I. 規格

#### Specifications

|                                     |                 |
|-------------------------------------|-----------------|
| Spinning Jet Type                   | JA-SP-16-1.3J-D |
| Air hole (mm)                       | Ø 1.3x2         |
| Pressure range(kg/cm <sup>2</sup> ) | 1 - 6           |
| Spinning count(den)                 | < 250           |
| Take-up speed (m/min)               | ~ 7000          |

### II. 噴嘴空氣耗氣量

#### Jet air consumption

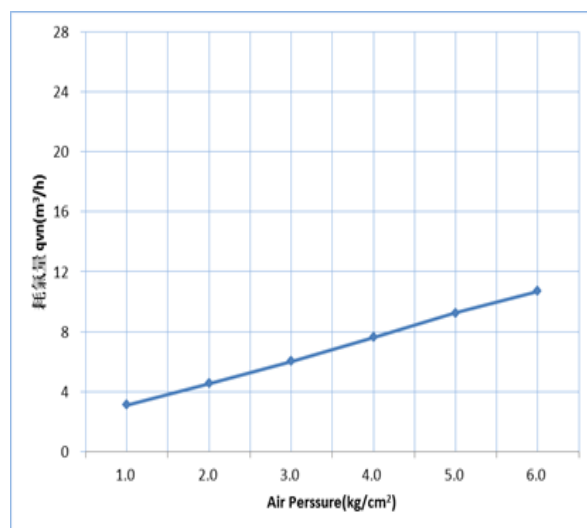

### III. 噴嘴尺寸

#### Jet dimensions

