



紡絲噴嘴 JA-SP Type

Spinning Jet JA-SP-04

可依顧客特殊需求來設計噴嘴氣孔尺寸。

開放式噴嘴設計，操作簡易，且有利於捲取製程作業及後道加工工程。


使用於 POY/FOY/FDY 與 SDY 加工工程。適用於聚酯纖維(PET)/聚醯胺纖維(NYLON) 和聚丙烯纖維(PP)等纖維。

Size of the air hole can be designed according to customer's different requirements.

Allows easier take-up/downstream processes.

Open type design provides fast operation.

This series can be used with polyester /polyamide/ polypropylene for POY/FOY/FDY and SDY applications.

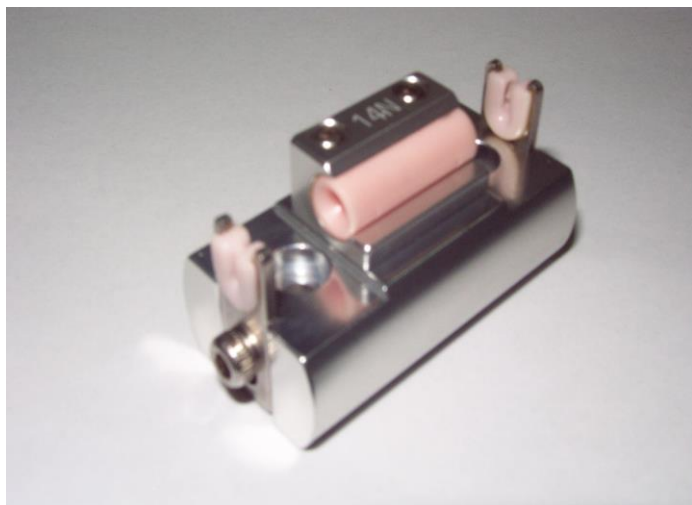


I. 規格

Specifications

Spinning Jet Type	JA-SP-04-1.4N-T2	JA-SP-04-1.6 N-T2	JA-SP-04-1.8 N-T2
Air hole (mm)	Ø 1.4	Ø 1.6	Ø 1.8
Pressure range (kg/cm ²)	1 - 6	1 - 6	1 - 6
Spinning count (den)	<300	<400	<500
Take-up speed (m/min)	<7000	<7000	<7000

II. 噴嘴空氣耗氣量

Jet air consumption

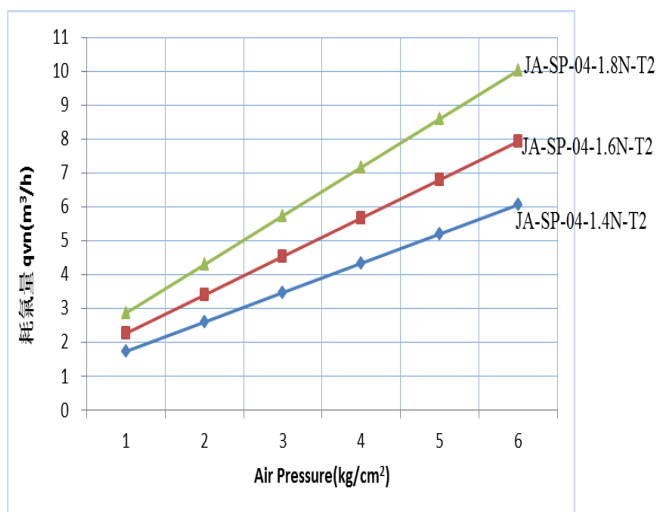

III. 噴嘴尺寸

Jet dimensions

