



# 紡絲噴嘴 JA-SP Type

## Spinning Jet JA-SP-35E-1.3-1E

體積極小。

開放式的設計，掛紗容易，操作簡單。

可依顧客特殊需求來設計噴嘴氣孔間距連排數。

使用於 POY/FOY/FDY 與 SDY 加工工程。適用於聚  
酯纖維 (PET)/ 聚醯胺纖維 (NYLON) 和聚丙烯  
纖維 (PP) 等纖維。

**Minimized volume.**

Open type design, very easy for yarn threading.

**The pitch and jet numbers for the multi-jet can be  
custom designed..**


This series can be used with polyester /polyamide/  
polypropylene for POY/FOY/FDY and SDY  
applications.



### I. 規格 Specifications

Spinning Jet Type	JA-SP-35E-1.3-1E
Air channel (mm)	∅ 1.3
Pressure range (kg/cm <sup>2</sup> )	1 - 6
Spinning count (den)	< 250
Take-up speed (m/min)	~ 7000

### II. 噴嘴空氣耗氣量 Jet air consumption

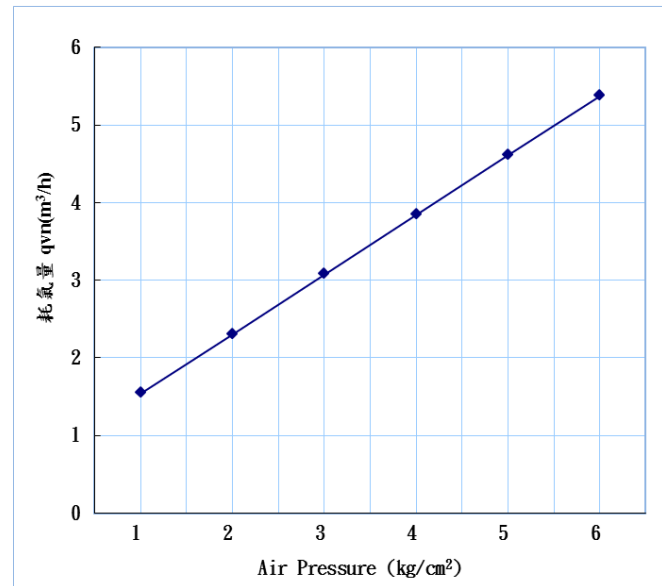

### III. 噴嘴尺寸 Jet dimensions

