



# 預噴嘴 J-IMG Type

## Migration Jet J-IMG-02

開放式的設計，掛紗容易，操作簡單。

J-IMG-02 空氣噴嘴專門設計應用在工業紗上且提供優異的油劑均勻性和低耗氣量。

使用於 POY/FOY/FDY 與 SDY 加工工程。適用於聚酯纖維(PET)/聚醯胺纖維(Nylon) 和聚丙烯纖維(PP)等纖維。

**Open type design, very easy for yarn threading.**

**J-IMG-02 air jet is specially designed for industrial application which and series of Migration jet provides excellent oil regularity and low air consumption.**

**This series can be used with polyester /polyamide/ polypropylene for POY/FOY/FDY and SDY applications.**



J-IMG-02



J-IMG-01


### I. 規格

#### Specifications

Spinning Jet Type	J-IMG-02
Air channel (mm)	Ø 1.3×12
Pressure range (kg/cm <sup>2</sup> )	0.5 – 2.5
Spinning count (den)	< 1500
Take-up speed (m/min)	~ 7000

### II. 噴嘴空氣耗氣量

#### Jet air consumption

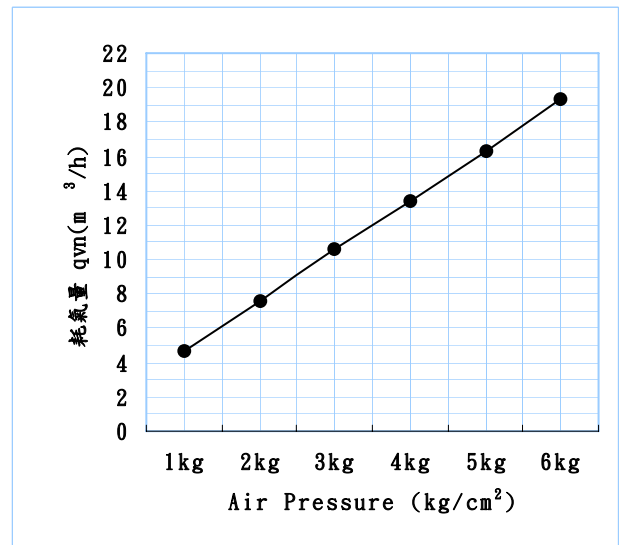

### III. 噴嘴尺寸

#### Jet dimensions

