



預噴嘴 JA-MG Type

Migration Jet JA-MG-02-A

具有最佳角度的三個氣孔設計，使紗線運作性佳，且具低耗氣性。

給予紗線一致的均油效果，減少毛羽產生，利於後續加工工程。

The three holes with the best angle design, good yarn operability, and low air consumption.

Provides excellent oil regularity, reduce broken filament, allows more efficient in downstream processes.




I. 規格

Specifications

Spinning Jet Type	JA-MG-02-A
Air hole (mm)	∅ 0.8x3
Pressure range(kg/cm ²)	0.5 -2.0
Spinning count(den)	< 500
Take-up speed (m/min)	~ 7000

II. 噴嘴空氣耗氣量

Jet air consumption

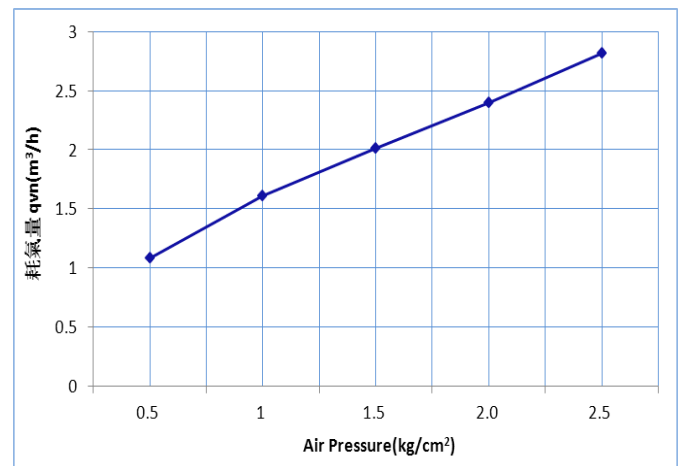

III. 噴嘴尺寸

Jet dimensions

