



# 預噴嘴 JA-MG Type


## Migration Jet JA-MG-03

具有最佳角度的三個氣孔設計，使紗線運作性佳，且具低耗氣性。

給予紗線一致的均油效果，減少毛羽產生，利於後續加工工程。

The three holes with the best angle design make good yarn operability and low air consumption.

Provides excellent oil regularity, reduce broken filament, allows more efficient in downstream processes.

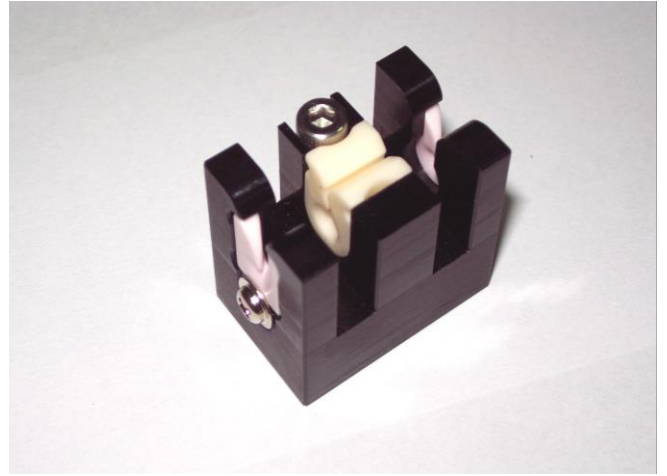


### I. 規格

#### Specifications

Spinning Jet Type	JA-MG-03
Air hole (mm)	Ø 0.75x3
Pressure range(kg/cm <sup>2</sup> )	0.5 -2.0
Spinning count(den)	< 500
Take-up speed (m/min)	~ 7000

### II. 噴嘴空氣耗氣量

#### Jet air consumption

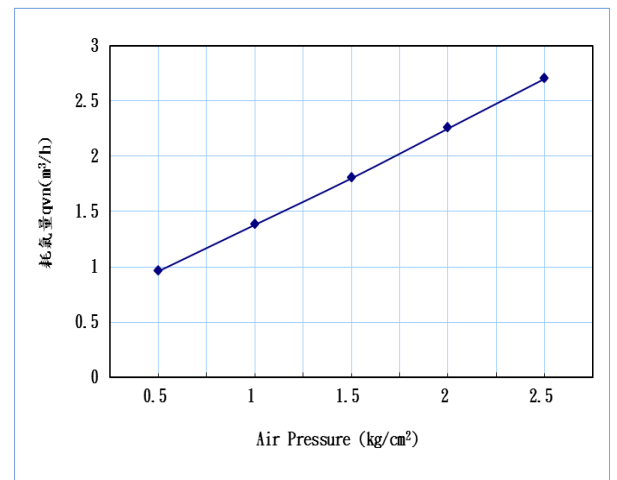

### III. 噴嘴尺寸

#### Jet dimensions

